


Axial Camera - CAM025

<https://ehle-hd.com/en/product/axial-camera-cam025/>

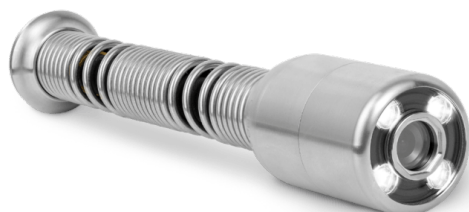

The **self-levelling axial camera CAM025** is a push rod camera for applications from DN 50 upwards and is designed for simple inspection. Thanks to its ingenious technology, the small axial view camera always delivers an upright image.

With its small diameter and its optimized arc mobility characteristics, it is the ideal camera for the inspection of branched house connection networks. The integrated adjustable LED illumination illuminates the inspection area optimally. Thanks to ingenious technology, even this small axial view camera delivers an upright image at all times.



Features

- Stainless steel housing
- 4 high powered ultra-bright LED lights
- a scratch resistant sapphire glass to protect the lens
- Effective Pixels 512 x 582 Resolution 470 HTVL
- Sensitivity < 1.0 Lux
- Aperture/Field of View F2.5 / 75°
- Illumination Intensity Adjustable to 12.5k Lux at 150mm
- Pressure Depth Rating 1 bar (14.50psi)

Scope of delivery:

- Axial camera probe CAM025
- tough transport case
- 3 centering skids

Attributes

Image	SKU	Productname	Attributes	LxWxH & Weight
	7001010	Axial Camera - CAM025 SL	work range: 50 - 250 mm use: Push rod coiler	280 × 41 × 41 mm 0.62
	7001011	Axial Camera - CAM025 SL (ATEX)	work range: 50 - 250 mm use: ATEX Zone 1 Push rod coiler	280 × 41 × 41 mm 0.62