


Flex-Packer with bypass 200-300

<https://ehle-hd.com/en/product/flex-packer-with-bypass-200-300/>

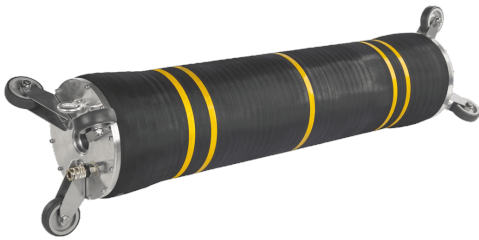


The **Flex-Packer DN 200 - 300 mm with bypass** enables the repair of pipe segments even in pipes with high water flow. No diversion or pumping is necessary. Thanks to their flexible design, the packers can be easily guided through a manhole opening and installed in the damaged pipe.

The packers have a chassis with a slight spring effect, which allows them to glide smoothly even over uneven surfaces. The wheels are positioned at an angle of 120 degrees. In addition, you can adjust the chassis individually to any pipe diameter.

Features

- Flex-Packer consists of a rubber jacket vulcanized onto two metal heads
- Flexible inner hose Ø 50 mm (passage) allows water to drain during rehabilitation
- Adjustable 3-point chassis with 6 wheels for easy positioning of the packer
- Open safety coupling with locking pin prevents unintentional uncoupling
- Equipped with tow eye and air coupling
- Nominal diameter Ø 170 mm
- **max. 1.5 bar (36.2 psi) operation pressure**

Attributes

Image	SKU	Productname	Attributes	LxWxH & Weight
	V1491044801	Flex-Packer with bypass 200-300 / 1.0 m	length: 1,000 mm contact length: 690 - 590 mm bypass: 50 mm operating pressure: 1.5 bar (21.8 psi)	1130 × 170 × 170 mm 10
	V1491066500	Flex-Packer with bypass 200-300 / 1.5 m	length: 1,500 mm contact length: 1190 - 1090 mm bypass: 50 mm operating pressure: 1.5 bar (21.8 psi)	1630 × 170 × 170 mm 12.5
	V1491046301	Flex-Packer with bypass 200-300 / 2.0 m	length: 2,000 mm contact length: 1690 - 1590 mm bypass: 50 mm operating pressure: 1.5 bar (21.8 psi)	2130 × 170 × 170 mm 15
	V1491066600	Flex-Packer with bypass 200-300 / 2.5 m	length: 2,500 mm contact length: 2190 - 2090 mm bypass: 50 mm operating pressure: 1.5 bar (21.8 psi)	2630 × 170 × 170 mm 17.5
	V1491046401	Flex-Packer with bypass 200-300 / 3.0 m	length: 3,000 mm contact length: 2690 - 2590 mm bypass: 50 mm operating pressure: 1.5 bar (21.8 psi)	3130 × 170 × 170 mm 20