


Flexible packer 200-300

<https://ehle-hd.com/en/product/flexible-packer-200-300/>





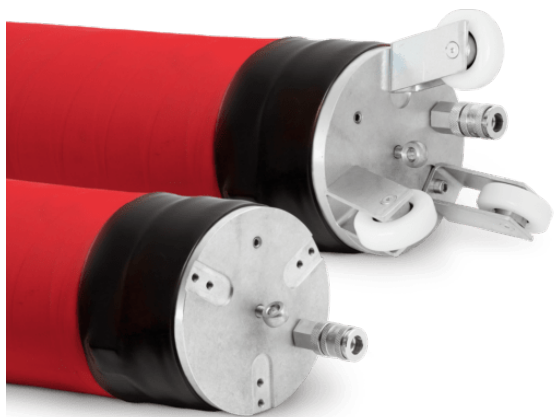




The **Flex-Packer DN 200-300 mm** was developed especially for sewer rehabilitation. The red, special extensible hose made of a soft rubber ensures very smooth contact surfaces and optimum transitions to the liner. As an option, we offer a carriage to facilitate the installation of short or long liners over long distances.

Available up to 10 m in length - special sizes on request.

Features

- light cast aluminium couplings
- optional snap on/off wheels for easy positioning of the packer
- raw dimension Ø 150 mm
- red, highly extensible hose (extension max. threefold outer diameter) with friction-resistant external sheet (smooth wrap, chequered fabric)
- Temperature range between -25°C and +60°C
- **max. 1.5 bar (36.2 psi) operation pressure**

Attributes

Image	SKU	Productname	Attributes	LxWxH & Weight
	2002220	Flexible Packer 200-300 / 0.8 m	length: 800 mm contact length: approx 650 - 550 mm operating pressure: 1.5 bar (21.8 psi)	800 × 150 × 150 mm 5.20
	2002221	Flexible Packer 200-300 / 1.0 m	length: 1,000 mm contact length: approx 850 - 750 mm operating pressure: 1.5 bar (21.8 psi)	1000 × 150 × 150 mm 5.90
	2002222	Flexible Packer 200-300 / 1.2 m	length: 1,200 mm contact length: approx 1,050 - 900 mm operating pressure: 1.5 bar (21.8 psi)	1200 × 150 × 150 mm 6.50
	2002224	Flexible Packer 200-300 / 1.5 m	length: 1,500 mm contact length: approx 1,250 - 1,150 mm operating pressure: 1.5 bar (21.8 psi)	1500 × 150 × 150 mm 7.40
	2002226	Flexible Packer 200-300 / 2.0 m	length: 2,000 mm contact length: ca. 1,750 - 1,650 mm operating pressure: 1.5 bar (21.8 psi)	2000 × 150 × 150 mm 8.80
	2002228	Flexible Packer 200-300 / 2.5 m	length: 2,500 mm contact length: ca. 2,250 - 2,150 mm operating pressure: 1.5 bar (21.8 psi)	2500 × 150 × 150 mm 10.5
	2002229	Flexible Packer 200-300 / 3.0 m	length: 3,000 mm contact length: ca. 2,750 - 2,650 mm operating pressure: 1.5 bar (21.8 psi)	3000 × 150 × 150 mm 11.8



2002231

Flexible Packer 200-300 / 4.0 m

length: 4,000 mm

contact length: ca. 3,750 - 3,650 mm

operating pressure: 1.5 bar (21.8 psi)

4000 × 150 × 150 mm
14.8



2003114

snap on/off wheels - typ 1-4

150 × 100 × 100 mm
1.20