


Flexible packer with wheels

<https://ehle-hd.com/en/product/flexible-packer-with-wheels/>





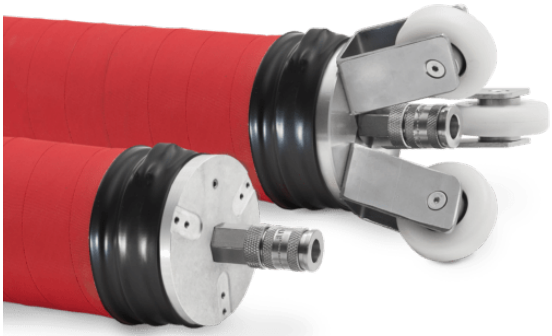




The **Flex-Packer DN 150 - 250 mm** with optional wheel system - this way, it is really easy to install short or long liners even over long distances. The red, special extensible hose made of a soft rubber ensures very smooth contact surfaces and optimum transitions to the liner.









special sizes on request.









Features

- light cast aluminium couplings
- optional snap on/off wheels for easy positioning of the packer
- red, highly extensible hose (extension max. threefold outer diameter) with friction-resistant external sheet (smooth wrap, chequered fabric)
- Temperature range between -25°C and $+60^{\circ}\text{C}$
- **max. 1.5 bar (36.2 psi) operation pressure**

Attributes

Image	SKU	Productname	Attributes	LxWxH & Weight
	2002180_A	Flexible Packer 150-250 / 0.8 m	work range: 150 - 250 mm length: 800 mm contact length: approx 650 - 550 mm operating pressure: 1.5 bar (21.8 psi)	800 × 100 × 100 mm 3.00
	2002181_A	Flexible Packer 150-250 / 1.0 m	work range: 150 - 250 mm length: 1,000 mm contact length: approx 850 - 750 mm operating pressure: 1.5 bar (21.8 psi)	1000 × 100 × 100 mm 3.30
	2002182_A	Flexible Packer 150-250 / 1.2 m	work range: 150 - 250 mm length: 1,200 mm contact length: approx 1,050 - 900 mm operating pressure: 1.5 bar (21.8 psi)	1200 × 100 × 100 mm 3.70
	2002183_A	Flexible Packer 150-250 / 1.5 m	work range: 150 - 250 mm length: 1,500 mm contact length: approx 1,350 - 1,200 mm operating pressure: 1.5 bar (21.8 psi)	1500 × 100 × 100 mm 4.20
	2002185_A	Flexible Packer 150-250 / 2.0 m	work range: 150 - 250 mm length: 2,000 mm contact length: approx 1,850 - 1,700 mm operating pressure: 1.5 bar (21.8 psi)	2000 × 100 × 100 mm 5.00
	2002188_A	Flexible Packer 150-250 / 2.5 m	work range: 150 - 250 mm length: 2,500 mm contact length: approx 2,350 - 2,250 mm operating pressure: 1.5 bar (21.8 psi)	2500 × 100 × 100 mm 6.00
	2002189_A	Flexible Packer 150-250 / 3.0 m	work range: 150 - 250 mm length: 3,000 mm contact length: approx 2,850 - 2,700 mm operating pressure: 1.5 bar (21.8 psi)	3000 × 100 × 100 mm 6.70

	2002190_A	Flexible Packer 150-250 / 4.0 m	work range: 150 - 250 mm length: 4.000 mm contact length: approx 3,850 - 3,750 mm operating pressure: 1.5 bar (21.8 psi)	4000 × 100 × 100 mm 8,50
	2002220	Flexible Packer 200-300 / 0.8 m	work range: 200 - 300 mm length: 800 mm contact length: approx 650 - 550 mm operating pressure: 1.5 bar (21.8 psi)	800 × 150 × 150 mm 5,20
	2002221	Flexible Packer 200-300 / 1.0 m	work range: 200 - 300 mm length: 1.000 mm contact length: approx 850 - 750 mm operating pressure: 1.5 bar (21.8 psi)	1000 × 150 × 150 mm 5,90
	2002222	Flexible Packer 200-300 / 1.2 m	work range: 200 - 300 mm length: 1.200 mm contact length: approx 1,050 - 900 mm operating pressure: 1.5 bar (21.8 psi)	1200 × 150 × 150 mm 6,50
	2002224	Flexible Packer 200-300 / 1.5 m	work range: 200 - 300 mm length: 1.500 mm contact length: approx 1,250 - 1,150 mm operating pressure: 1.5 bar (21.8 psi)	1500 × 150 × 150 mm 7,40
	2002226	Flexible Packer 200-300 / 2.0 m	work range: 200 - 300 mm length: 2.000 mm contact length: ca. 1,750 - 1,650 mm operating pressure: 1.5 bar (21.8 psi)	2000 × 150 × 150 mm 8,80
	2002228	Flexible Packer 200-300 / 2.5 m	work range: 200 - 300 mm length: 2.500 mm contact length: ca. 2,250 - 2,150 mm operating pressure: 1.5 bar (21.8 psi)	2500 × 150 × 150 mm 10,5
	2002229	Flexible Packer 200-300 / 3.0 m	work range: 200 - 300 mm length: 3.000 mm contact length: ca. 2,750 - 2,650 mm operating pressure: 1.5 bar (21.8 psi)	3000 × 150 × 150 mm 11,8

	2002231	Flexible Packer 200-300 / 4.0 m	work range: 200 - 300 mm length: 4.000 mm contact length: ca. 3.750 - 3.650 mm operating pressure: 1.5 bar (21.8 psi)	4000 × 150 × 150 mm 14.8
	2002260	Flexible Packer 250-400 / 1.0 m	work range: 250 - 400 mm length: 1.000 mm contact length: approx 700 - 550 mm operating pressure: 1.5 bar (21.8 psi)	1000 × 205 × 205 mm 11.0
	2002262	Flexible Packer 250-400 / 1.2 m	work range: 250 - 400 mm length: 1.200 mm contact length: approx 950 - 850 mm operating pressure: 1.5 bar (21.8 psi)	1200 × 205 × 205 mm 12.2
	2002264	Flexible Packer 250-400 / 1.5 m	work range: 250 - 400 mm length: 1.500 mm contact length: approx 1.200 - 1.100 mm operating pressure: 1.5 bar (21.8 psi)	1500 × 205 × 205 mm 14.2
	2002266	Flexible Packer 250-400 / 2.0 m	work range: 250 - 400 mm length: 2.000 mm contact length: approx 1.700 - 1.600 mm operating pressure: 1.5 bar (21.8 psi)	2000 × 205 × 205 mm 17.2
	2002268	Flexible Packer 250-400 / 2.5 m	work range: 250 - 400 mm length: 2.500 mm contact length: approx 2.200 - 2.100 mm operating pressure: 1.5 bar (21.8 psi)	2500 × 205 × 205 mm 20.5
	2002270	Flexible Packer 250-400 / 3.0 m	work range: 250 - 400 mm length: 3.000 mm contact length: approx 2.700 - 2.600 mm operating pressure: 1.5 bar (21.8 psi)	3000 × 205 × 205 mm 23.8
	2002272	Flexible Packer 250-400 / 4.0 m	work range: 250 - 400 mm length: 4.000 mm contact length: approx 3.700 - 3.600 mm operating pressure: 1.5 bar (21.8 psi)	4000 × 205 × 205 mm 30.2

2003114

snap on/off wheels - typ 1-4

150 × 100 × 100 mm
1.20

