


## Lifting bag with 8 bar

<https://ehle-hd.com/en/product/lifting-bags/>

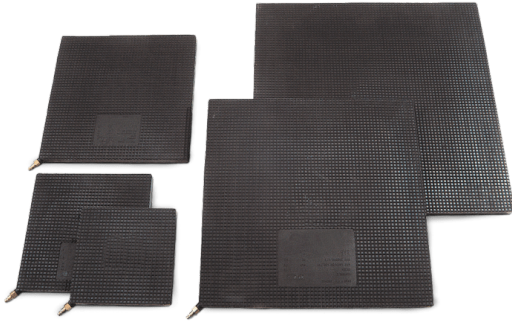






The **Lifting bag with 8 bar** are made of high quality rubber, reinforced with Kevlar insert, thus they are versatile and serve for lifting heavy loads. The basic version consists of five types with lifting capacity from 3 to 30 tons.

The lifting bags are used as a necessary aid in natural disasters, car or railroad accidents, as well as in the alignment of heavy components, lifting of all types of vehicles and tire changing. They are also used in many other industries: firefighting, defense, installation and renovation of water, gas and oil pipelines, in quarries for splitting stone blocks, at airports, etc.

### Features

- for lifting heavy loads and vehicles
- with 8 bar operating overpressure
- for aligning heavy components during assembly
- for special applications, such as splitting stone blocks and much more
- weather and temperature resistant (in the temperature range from -30°C to 80°C)
- easy handling and quick use
- filling via standard air couplings

## Attributes

| Image  | SKU     | Productname               | Attributes  | LxWxH & Weight            |
|--|---------|---------------------------|---|---------------------------|
|    | 2003400 | Lifting bag 230x230 - 3t  | <b>lifting force:</b> 3 tons<br><b>lifting height:</b> 120 mm<br><b>slide-in height:</b> 27 mm<br><b>operating pressure:</b> 8,0 bar (116 psi)<br><b>bursting pressure:</b> 75 bar (1088 psi) | 230 × 230 × 26 mm<br>1.50 |
|    | 2003401 | Lifting bag 300x300 - 6t  | <b>lifting force:</b> 6 tons<br><b>lifting height:</b> 160 mm<br><b>slide-in height:</b> 27 mm<br><b>operating pressure:</b> 8,0 bar (116 psi)<br><b>bursting pressure:</b> 64 bar (928 psi)  | 300 × 300 × 26 mm<br>2.40 |
|    | 2003404 | Lifting bag 390x390 - 10t | <b>lifting force:</b> 10 tons<br><b>lifting height:</b> 210 mm<br><b>slide-in height:</b> 27 mm<br><b>operating pressure:</b> 8,0 bar (116 psi)<br><b>bursting pressure:</b> 57 bar (826 psi) | 390 × 390 × 26 mm<br>4.30 |
|  | 2003406 | Lifting bag 530x530 - 20t | <b>lifting force:</b> 20 tons<br><b>lifting height:</b> 300 mm<br><b>slide-in height:</b> 27 mm<br><b>operating pressure:</b> 8,0 bar (116 psi)<br><b>bursting pressure:</b> 45 bar (652 psi) | 530 × 530 × 26 mm<br>7.60 |
|  | 2003408 | Lifting bag 640x640 - 30t | <b>lifting force:</b> 30 tons<br><b>lifting height:</b> 350 mm<br><b>slide-in height:</b> 27 mm<br><b>operating pressure:</b> 8,0 bar (116 psi)<br><b>bursting pressure:</b> 36 bar (522 psi) | 640 × 640 × 26 mm<br>11.2 |