


Rotation nozzle with optional rotation

<https://ehle-hd.com/en/product/rotation-nozzle-with-optional-rotation/>

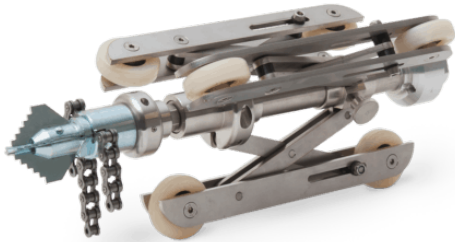

The **Tube-Weasel** with optional rotation is a useful aid for preparing tube refurbishment.

The generous tools assortment allow all challenges to be solved. The unique feature is optional rotation which can be activated by an increase in pressure. This way, you may prepare exactly the location to be refurbished without damaging the tube over its entire length.

The optional rotation (activated by an increase in pressure) allows targeted operation. Thus, the chain scraper or cable tool heads will not damage intact tube lengths. Measure damaged spots or nested roots to move the tube weasel and to activate the spinning tool after a pressure increase. Reduce pressure when exiting to avoid any damage to the intact tube.

Features

- cleaning operations with spinning heads
- removal of roots with the milling chain head
- **also suitable for vans with a water reclaiming system**


Available stock:

- Tube-Weasel with optional rotation DN 150 - DN 400
- tool drive for the milling chain head and cable tools
- hook wrench for assembly
- rugged transport case

Ordering instructions:

- Please indicate the intended use in your order, so we can recommend the perfect tool.

Attributes

Image	SKU	Productname	Attributes	LxWxH & Weight
	1120170	1/2" Tube-Weasel	connection: 1/2" female thread application from: 150 - 400 mm water supply: from 80 lpm thrust nozzles: 3x M6 thrust jet angle: 30°	340 × 140 × 140 mm 4.74
	1120285	3/4" Tube-Weasel	connection: 1/2" female thread application from: 150 - 400 mm water supply: from 100 lpm thrust nozzles: 3x M6 thrust jet angle: 30°	340 × 140 × 140 mm 4.74
	1120196	retainer - single milling chain		50 × 40 × 40 mm 0.30
	1120180	replacement milling chain 1 m		1000 × 8 × 8 mm 0.60
	1120173	retainer - double milling chain		70 × 40 × 40 mm 0.40
	1120187	replacement double milling chain 1 m		1000 × 8 × 20 mm 0.80
	1120123	KRD nozzle head Multi-Power	connection: 3/8" female thread application from: (-) water supply: (-) thrust nozzles: (-) thrust jet angle: (-) spinning nozzles: 4x M4 spinnig jet angle: rotation 90° / 43°	48 × 50 × 50 mm 0.55

	1120126	BRD nozzle head Multi-Power	connection: 3/8" female thread application from: (-) water supply: (-) front nozzles: 3x M4 front jet angle: 20° / 5° spinning nozzles: 2x M4 spinnig jet angle: rotation 90°	48 × 50 × 50 mm 0.54
	1120127	HRR nozzle head Multi-Power	connection: 3/8" female thread application from: (-) water supply: (-) front nozzles: (-) front jet angle: (-) spinning nozzles: 4x M4 spinnig jet angle: rotation 43°	48 × 50 × 50 mm 0.55
	1120128	RRD nozzle head Multi-Power	connection: 3/8" female thread application from: (-) water supply: (-) thrust nozzles: (-) thrust jet angle: (-) spinning nozzles: 4x M4 spinnig jet angle: rotation 90°	48 × 50 × 50 mm 0.55
	1120280	adaptor for cable tools 22	cable typ: 22 mm	62 × 30 × 30 mm 0.15
	1120281	adaptor for cable tools 32	cable typ: 32 mm	70 × 30 × 30 mm 0.18
	1120266	adaptor hose 3/4" male auf 1" female		3000 × 30 × 30 mm 1.5